



HCB PUMP

Applications:

- Cutting, turning, milling, boring, grinding and similar applications of the machine tools,
- Especially used for deep hole boring operations due to supply 25 bar pressure,
- Circulation systems. HCB Pumps are used for pumping of cutting / cooling fluids.

Fluid Specifications:

- Coolants,
- Cutting oils,
- Grinding oils,
- Water,
- Fluid temperature 0...80 °C
- Kinematic viscosity 1...30 mm²/s

Materials:


Pump body	: Cast iron - DIN GG 25
Bottom plate	: Sheet iron
Diffuser	: Stainless steel - DIN 4301 (AISI 304)
Impeller	: Stainless steel - DIN 4301 (AISI 304)
Strainer	: Stainless steel - DIN 4301 (AISI 304)
Pump shaft	: Stainless steel - DIN 4401 (AISI 316)
O-ring	: Viton
Mechanical seal	: C - SiC - Viton TuC - SiC - Viton (Optional) TuC - TuC - Viton (Optional)
Electric motor	: 3 phase induction motor 2 pole, 3000 rpm Protection degree IP 55

* M16x1,5 cable gland is used on HCB/06 and HCB/08 pumps.

** The performance curves are based on 1 mm²/s (cSt) kinematic viscosity values and 1000 kg/m³ density

*** Curve tolerance according to EN ISO 9906.

DIMENSIONS & NOMINAL VALUES

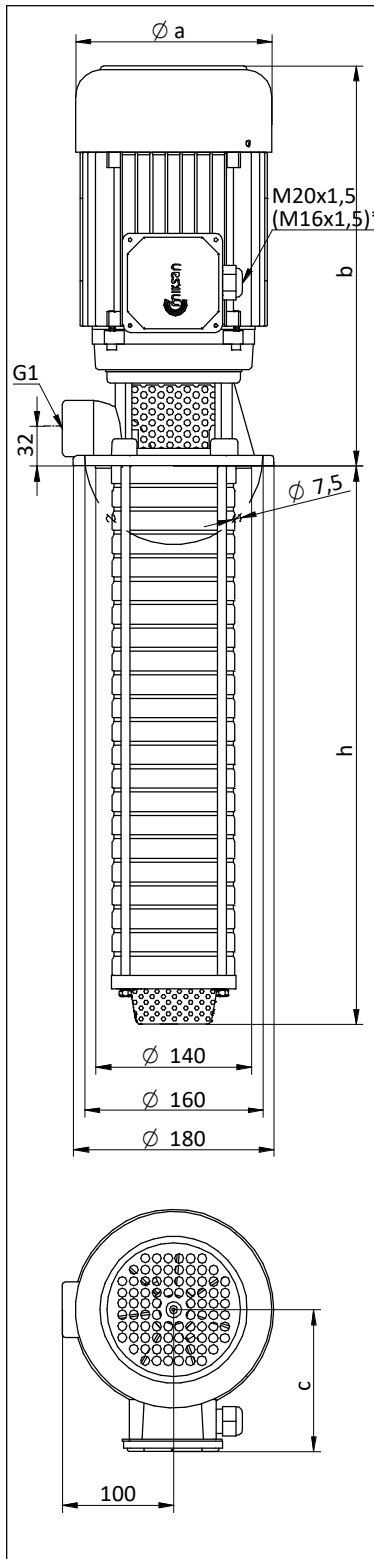

TYPE	Depth of immersion h (mm)	a	b	c	Weight kg	Power kW	Voltage V(Δ/Y)	Frequency Hz	Rated current A	Speed rpm
		mm								
HCB/06	206	157	319	118	17.0	1.1	230/400	50	4.16/2.4	2890
HCB/08	248	157	319	118	17.5	1.1	230/400		4.16/2.4	2890
HCB/10	291	176	365	139	25.0	2.2	230/400		7.79/4.5	2905
HCB/12	333	176	365	139	25.5	2.2	230/400		7.79/4.5	2905
HCB/15	396	194	397	150	33.0	3.0	230/400		10.39/6.0	2905
HCB/17	438	194	397	150	33.5	3.0	230/400		10.39/6.0	2905
HCB/20	501	194	397	150	37.0	4.0	230/400		13.68/7.9	2900
HCB/22	543	194	397	150	37.5	4.0	230/400		13.68/7.9	2900
HCB/25	606	194	397	150	39.5	4.0	230/400		13.68/7.9	2900

Performance Curve

